


SILO COVERS

NESTED REARWARD SLIDING COVER



PRINCIPLE

The cover comprises 2 moving panels on the unloading side and one fixed panel on the furnace room side.

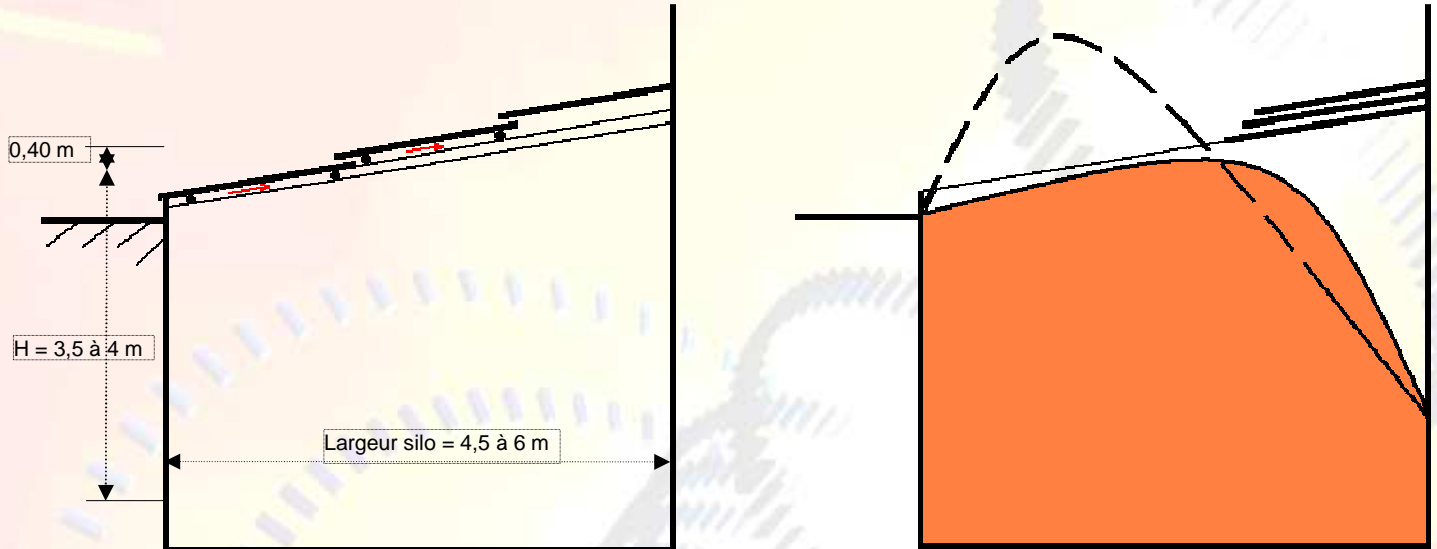

This equipment is suitable for use with: Square silos with retractable arm extractors,
Rectangular silos with hydraulic pusher extractors.

ADVANTAGES

- Good structural integration,
- No handholds outside the silo.

DEFAULTS

- Silo only opens to 2/3 its width. Trucks have to limit their reverse movements so as not to damage the silo cover during unloading which means that the silo does not fill up satisfactorily at the back,
- The fuel pile has to be levelled by hand after unloading in order to close the cover,
- This system is not recommended for use in mountainous areas as snow would have to be cleared off the two sliding panels before opening,
- Cover not suited to silos with width < 4.5 m.

EXAMPLES OF COMPLETED INSTALLATIONS



COMPTE.R. Z.I. DE VAUREIL - BP 10 - F 63220 ARLANC

☎: ++33 473 950 191 / 📠: ++33 473 951 536 / ✉: info@compte-r.com

This document is property of COMPTE.R. The information included can not be used, reproduced or communicated without its prior written agreement