


SILO COVERS

UPWARDS FOLDING COVER



PRINCIPLE

The cover comprises 2 panels that can be folded upwards. Roller wheels with diameter > 200 mm will be required to reduce opening forces.

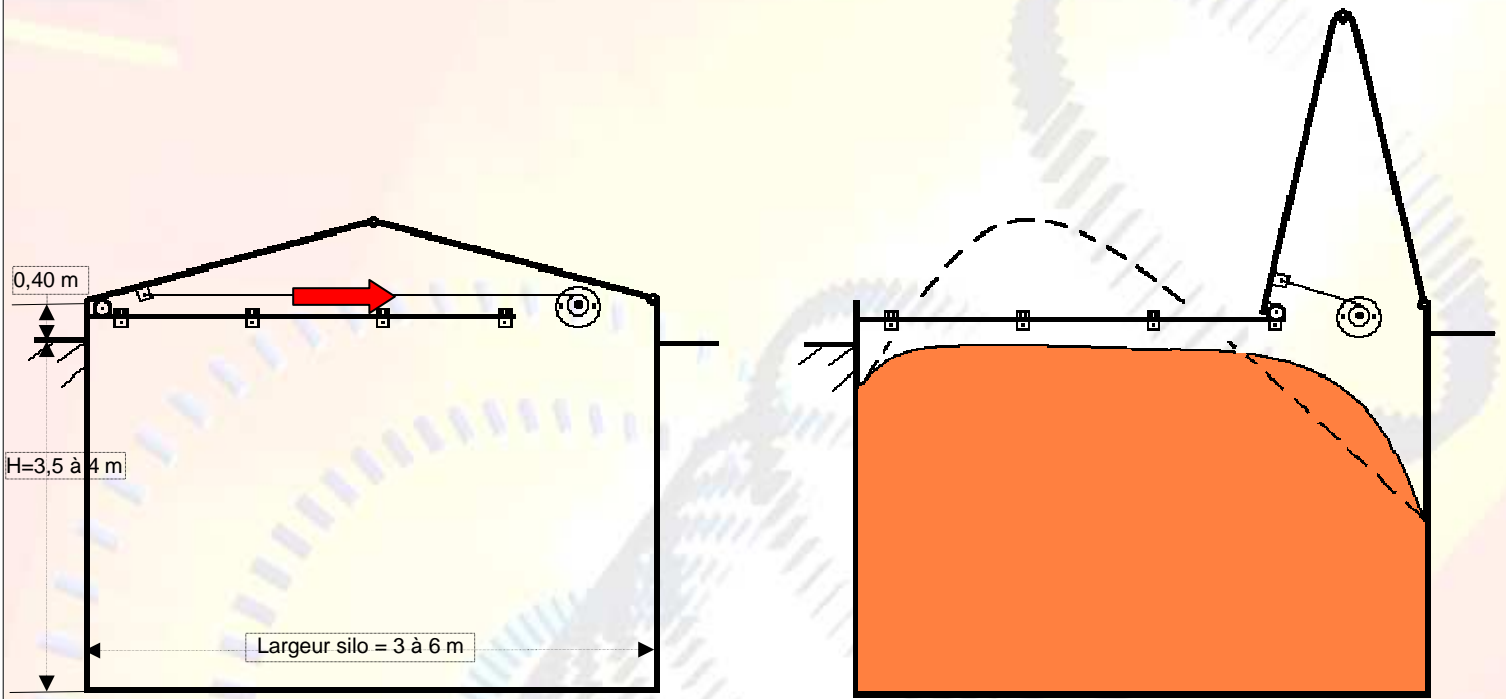

This equipment is suitable for use with: Square silos with retractable arm extractors,
Rectangular silos with hydraulic pusher extractors.

ADVANTAGES

- No handholds outside the silo,
- Silo opens to nearly its full width.

DEFAULTS

- The fuel needs to be levelled by hand after unloading in order to close the cover,
- System not recommended for use in mountainous areas due to snow; the cover panel would have to be cleared before opening to prevent any snow getting into the silo.

EXAMPLES OF COMPLETED INSTALLATIONS



COMPTE.R. Z.I. DE VAUREIL - BP 10 - F 63220 ARLANC

☎: +33 473 950 191 / 📠: +33 473 951 536 / ✉: info@compte-r.com

This document is property of COMPTE.R. The information included can not be used, reproduced or communicated without its prior written agreement