


SILO COVERS

SIDE-SLIDING COVER



PRINCIPLE

The cover comprises 2 panels that slide both ways over the silo (full opening) or just to one side of the silo (opening along half of the silo's length). Roller wheels with diameter > 200 mm will be required to facilitate cover displacement.

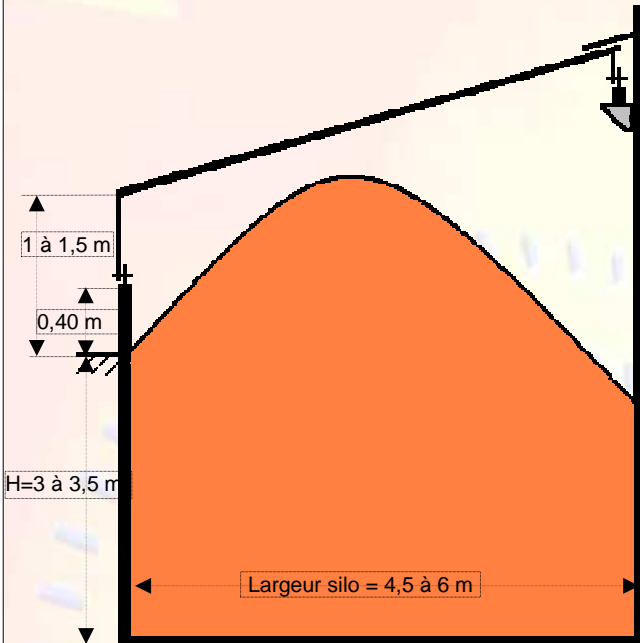

This equipment is suitable for use with:

- Square silos with retractable arm extractors,
- Rectangular silos with hydraulic pusher extractors.

ADVANTAGES

- Silo opens across its full width; the same applies lengthwise if the cover panels slide both ways,
- If the cover is raised in relation to the road, there is no need to level the fuel after unloading,
- System suitable for use in mountainous areas.

DEFAULTS

- The cover projects over one or both sides of the silo.

EXAMPLES OF COMPLETED INSTALLATIONS



COMPTE.R. Z.I. DE VAUREIL - BP 10 - F 63220 ARLANC

☎: +33 473 950 191 / 📠: +33 473 951 536 / ✉: info@compte-r.com

This document is property of COMPTE.R. The information included can not be used, reproduced or communicated without its prior written agreement