


SCRAPERS CONVEYOR



1. GENERAL PRESENTATION

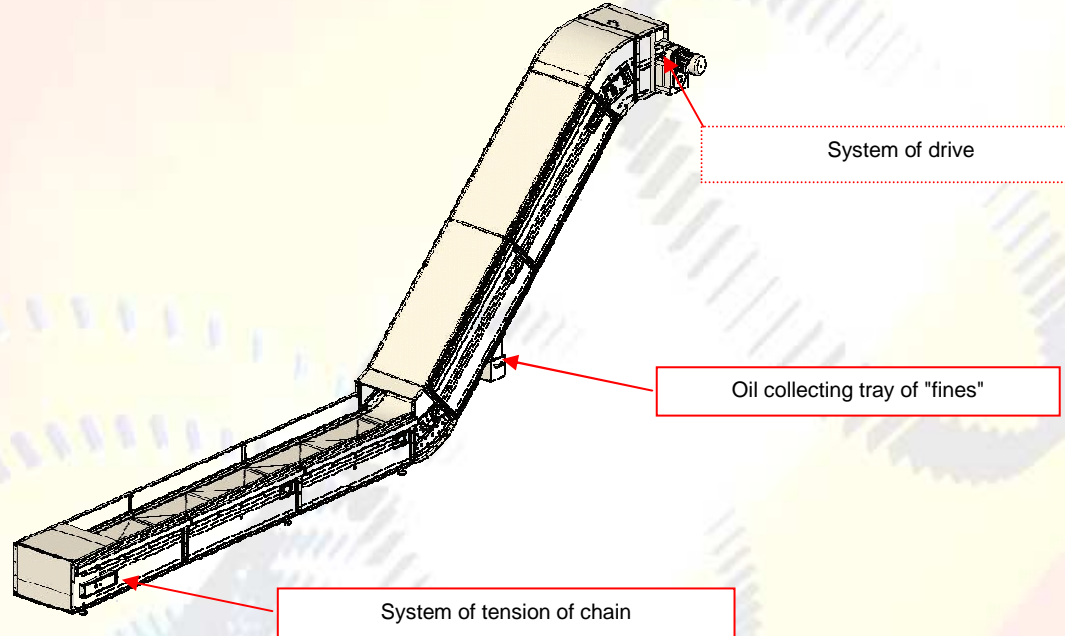

2. FUNCTION

This conveyor takes again fuel at exit of the silo's extractor to convey it until the fuel introduction system of the boiler.

3. DIMENSIONING

Standards widths are: 500, 600, 700 and 800 mm

The length is adapted to the equipments of the installation.

This conveyor takes again fuel at exit of the silo's extractor to convey it until the fuel introduction system of the boiler.

4. CONSTRUCTION

It is a welded construction mechanic; the conveyor consists of 2 side conveyor chains, connected by metal cleats in a sheet box reinforced entirely closed in order to avoid the emissions of dust or any accident. The drive is ensured by a motor reductor; the low speed in advance of the chain allows a reduction very appreciably of wear.

The elbows are equipped with easily interchangeable wearing parts.

The whole of the higher careenage is dismantable.

COMPTE.R. ZI DE VAUREIL - BP 1 - F 63220 ARLANC

☎: +33 473 950 191 / 📠: +33 473 951 536 / ✉: info@compte-r.com

"This document is property of COMPTE.R. The information included can not be used, reproduced or communicated without its prior written agreement"